


Technical Data

* Specifications are subject to change.
Consult with your sales representative for confirmation of current offering.

Cute 380

Technology Type	Digital Light Processing (DLP)	Network Type and Protocol	Ethernet, IEEE 802.3 using TCP/IP and NFS
Build Envelope Capacity	384 x 216 x 300 mm	Electrical Requirements	200-240 VAC, 50/60 Hz, Single phase
Accuracy	±0.06 mm	Operation System	Windows 10
Printing Speed	40 mm/h	Input Data File Format	UTK
Resolution	3840 x 2160	Rated Power	1.0 kVA
Light Source	UV LED	Systems Control	Closed-loop
Projection Method	Top-down projection	Temperature Range	72–79 °F (22–26 °C)
Layer Thickness	±0.02 mm	Maximum Change Rate	1 °C/hour
DMD	DLP660TE	Relative Humidity	< 40% non-condensing
Pixel Size	0.1 mm	Machine Size (W x D x H)	742 x 842 x 1910 mm
Wavelength	405 nm	Machine Weight	398 kg
Controlling Software	UnionTech™ DSCON	Processing and Finishing	Post-Curing Unit (optional)
Data Preparation Software	Polydevs Pro, BPC	Warranty	12 months

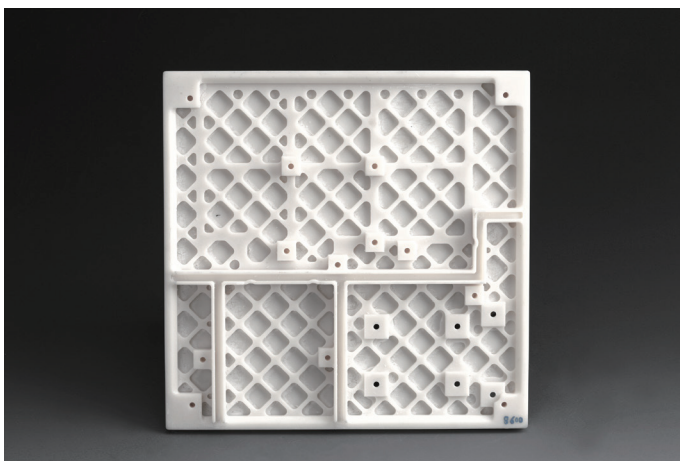

UnionTech

UnionTech 3D LTD

Room 102, Unit 40, 258 Xinzhuang Rd, Shanghai, 201612, China
mkt@uniontech3d.com Tel: +86-021-64978786
www.uniontech3d.com

UnionTech GmbH

Regus Berliner Carree, Berliner Allee 47,
64295 Darmstadt, Germany
Tel: +49 (0) 6151-2776067
info@uniontech3d.de
www.uniontech3d.de

UnionTech Russia

4, 2nd Roschinskay str., office 314,
115191, Moscow, Russia
Tel: +79100025900
info@uniontech3d.ru
www.uniontech3d.ru